

# RUST BREAKER® PENETRANT



## LU™103



Light Pressure Lubricant




NSF® Registered; H2 Rated (Lubricants with no contact) (Registration # 127526)



Dielectric strength value: 47,400 Volts



Minimum - Maximum operational temperature range: Low -20 °F (-29 °C) • High 550 °F (288 °C)



Flash Point: 205 °F (96 °C)



HMIS Hazard Rating: Health (2) • Flammability (0) • Reactivity (0)

- Non-flammable propellant
- Will not harm painted surfaces
- Loosens rust and frozen parts
- Fast penetration



PRESERVE. PROTECT. PREVENT.™

Sprayon® LU™103 Rust Breaker® Penetrant is a fast-acting product that quickly loosens rust while penetrating grease and dirt. A transparent, non staining oil, its light film displaces moisture and acts as a corrosion preventative. Jet stream sprays up to two feet for safe, accurate application. It is a one coat rust and corrosion preventive compound. Pleasant vanilla scent.

# LUBRICANTS

## USES

- Release rusted or frozen lugs and bolts
- Repair work
- General overhaul
- For use on phosphated or non-phosphated machined parts
- Automotive parts
- Crank shafts
- Other metal components

## APPLICATION

Maximum performance is achieved when the metal surfaces to be protected are clean, dry and free of rust, oil and mill scale. Product should be sprayed in a well ventilated area. Sprays best at room temperature (70°F.). Shake well before using. Spray at a distance of 10" to 12" from surface.

## PERFORMANCE

- DIELECTRIC STRENGTH:** 47,400 volts
- PLASTIC SAFE:** Yes
- TEMPERATURE RANGE:**
- LOW:** -20°F
- HIGH:** 550°F
- LOAD CAPACITY:** Low
- SALT SPRAY CORROSION (ASTM B-117):** will withstand over 120 hrs.
- HUMIDITY CABINET TEST (ASTM D-1748):** 2,000 hours minimum
- NSF Registration Number: 115050, H2 Rated
  - Penetrant
  - Water-Displacer
  - Rust Inhibitor
  - Non-flammable propellant
  - Equipped with SPRAY ANYWAY™ valve and extension tube
  - Jet stream spray for safe accurate application
  - Active water displacing, creep, and penetrating properties

## PROPERTIES

- APPEARANCE:** Light amber
- ODOR:** Vanilla
- PROPELLANT:** CO2
- WT./GAL.:** 6.68
- SPECIFIC GRAVITY:** 0.80
- PAINTABLE:** No
- H.A.P.S. (Hazardous Air Pollutants):** No
- SARA 313 Chemicals:** No
- PROP 65:** No
- % VOC AEROSOL:** 85%
- V.O.C. COMPLIANT CALIFORNIA:** Yes
- V.O.C. COMPLIANT OTC STATES:** Yes
- FLAMMABLE:** Yes
- FLASH POINT:** >200°F
- HAZARD RATING:** 2,4,0;
- SHELF LIFE:** 3 years from date of manufacture

## SHIPPING

Refer to section 14 of the material safety data sheet for proper transport information and labeling.

## PACKAGING


- Stock #:** S00103
- UPC Code:** 0-75577-90103-6
- Fill Wt.:** 10 oz.
- Per Case:** 12
- Carton Dimensions:**  
L 10-7/8" x W 8-3/16" x H 8"

## RESOURCES

- MSDS/EDS/PRODUCT DATA SHEETS:**  
sprayon.com
- CUSTOMER SERVICE:**  
1-800-777-2966
- TECHNICAL INFORMATION:**  
1-800-251-2486



LU103

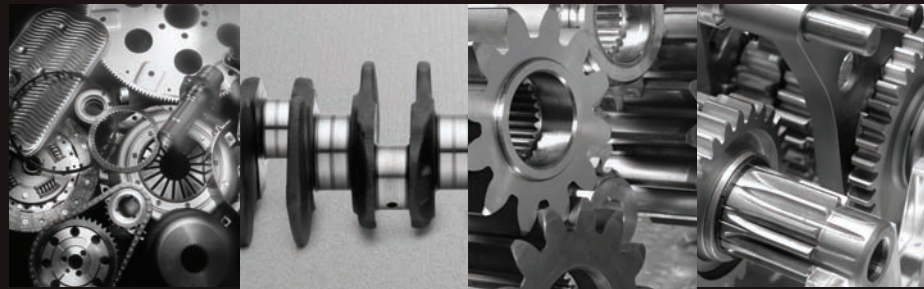

© 2010 Sprayon® Products Made in U.S.A.

Distributed by:

**USA Roller Chain & Sprockets**  
**sales@usarollerchain.com**  
**(407) 347-3519**

PRESERVE. PROTECT. PREVENT.



**Sprayon® Products**  
 101 Prospect Ave. NW  
 Cleveland, OH 44115  
 Sprayon.com  
 1-800-777-2966

310-PDS-LU103