







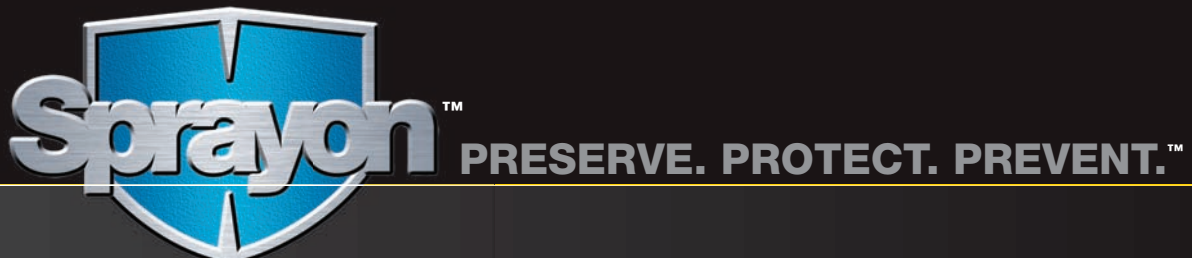
FOOD GRADE SILICONE LUBRICANT



LU™ 210

- 
Light Pressure Lubricant
- 
NSF® Registered; H2 Rated (Lubricants with no contact) (Registration # 115089)
- 
Minimum - Maximum operational temperature range: Low -40 °F (-40 °C) • High 450 °F (232 °C)
- 
5% Silicone
- 
Features Spray Anyway™ nozzle
- 
HMIS Hazard Rating: Health (2) • Flammability (4) • Reactivity (0)

- Meets FDA regulations
- Safe on styrene and urethanes
- Stops sticking without transfer



Sprayon® LU™ 210 Food Grade Silicone Lubricant is a 5% low-viscosity silicone formula that is compatible with most surfaces. Meets FDA regulation described in Title 21 paragraph 178.3570, when no more than 1 ppm is imparted. NSF H1 rated for use in federally-inspected meat and poultry plants. Effective from -40°F to +450°F. Repels water and is non-corrosive to metals. An excellent lubricant on plastic, fiber gears, extruded parts, wood-to-wood sliding applications and on rubber.

LUBRICANTS

USES

- Slides
- Food and drug processing equipment
- Guides
- Knives
- Food racks
- Slicers
- Heat sealing equipment
- Saws
- Overhead drives
- Grinders
- Belts
- Mixers
- Bottling machines
- Conveyors
- Chutes

APPLICATION

Maximum performance is achieved when the metal surfaces to be protected are clean, dry and free of rust, oil and mill scale. Product should be sprayed in a well ventilated area. Sprays best at room temperature (70F.) Shake well before using. Spray at a distance of 10" to 14" from surface.

PERFORMANCE

- PLASTIC SAFE:** Yes
TEMPERATURE RANGE:
LOW: -40°F
HIGH: 450°F
LOAD CAPACITY: Light
- NSF Registration Number 115089, H1 Rated
 - Penetrant
 - Water-Displacer
 - Rust Inhibitor
 - Equipped with SPRAY ANYWAY™ valve
 - Equipped with an extension tube for hard-to-reach areas

PHYSICAL

- APPEARANCE:** Clear liquid
ODOR: Slight solvent
PROPELLANT: Hydrocarbon
WT./GAL.: 5.42
SPECIFIC GRAVITY: 0.65
VISCOSITY: Low
PAINTABLE: No
% VOC AEROSOL: 95.00%
V.O.C. COMPLIANT CALIFORNIA: Yes
V.O.C. COMPLIANT OTC STATES: Yes
FLAMMABLE: Yes
FLASH POINT: <0°F
HAZARD RATING: 2,4,0
SHELF LIFE: 3 years from date of manufacture

PACKAGING

- Stock #:** S00210
UPC Code: 0-75577-90210-1
Fill Wt.: 10 oz.
Per Case: 12
Carton Dimensions:
 L 11.13" x W 8.44" x H 8.38"

RESOURCES

- MSDS/EDS/PRODUCT DATA SHEETS:**
sprayon.com
CUSTOMER SERVICE:
 1-800-777-2966
TECHNICAL INFORMATION:
 1-800-251-2486

SHIPPING

Refer to section 14 of the material safety data sheet for proper transport information and labeling.



LU210



© 2010 Sprayon® Products Made in U.S.A.

Distributed by:

USA Roller Chain & Sprockets
sales@usarollerchain.com
(407) 347-3519

PRESERVE. PROTECT. PREVENT.



Sprayon® Products
 101 Prospect Ave. NW
 Cleveland, OH 44115
Sprayon.com
 1-800-777-2966

310-PDS-LU210